

Panasonic



New PACi NX Series. The next generation is here.

- PACi NX Series Standard range, for absolute ease of refurbishment
- Flexible control option with IoT integration
- PACi NX Series includes nanoe™ X function as standard
- New Adaptive Ducted PF3 has been completely re-designed to have better flexibility.
- 90x90 Cassettes have been developed to satisfy today's customer needs.



New PACi NX Series. The next generation is here.




NX Series with R32 refrigerant has been developed to meet the demand of easy refurbishment with 3 wired method. Also integrated with IoT solutions and includes nanoe™ X function as standard.




1 PACi NX Series - Standard range, for absolute ease of refurbishment

This new series has been developed with 3 wired method and communication. It makes it simple and easy to replace old systems with 3 wire connections, which is prevalent in many systems.

PACi PZ2/PZH2: 2 wire method.




New PACi NX Series: 3 wire method.



2 Flexible control option with IoT integration

New wired remote controller series are fully integrated with IoT solutions developed by Panasonic. Detailed operation, maintenance setting and service operation are all possible with smartphone or tablet.

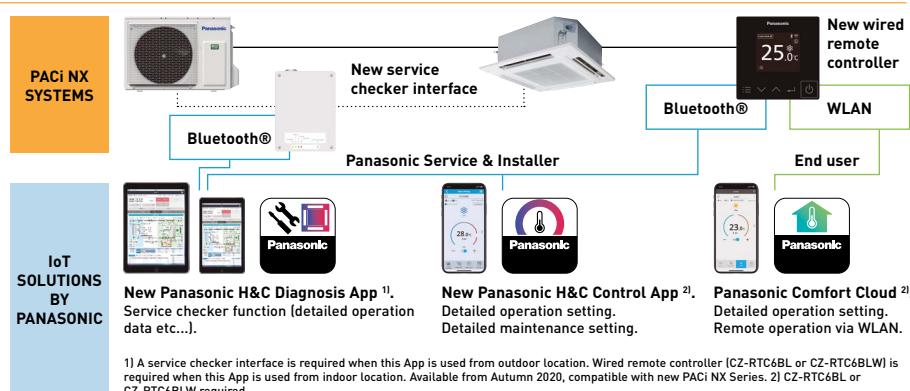


1) A service checker interface is required when this App is used from outdoor location. Wired remote controller (CZ-RTC6BL or CZ-RTC6BLW) is required when this App is used from indoor location. Available from Autumn 2020, compatible with new PACi NX Series. 2) CZ-RTC6BL or CZ-RTC6BLW required.

3 Let Panasonic take care of indoor air quality

nanoe™ X inhibits a wide variety of bacteria, viruses and pollutants, and can deodorise the environment and deodorises the environment. This unique technology is equipped to provide better air quality whether residential or commercial.




7 effects of nanoe™ X – Panasonic unique technology.

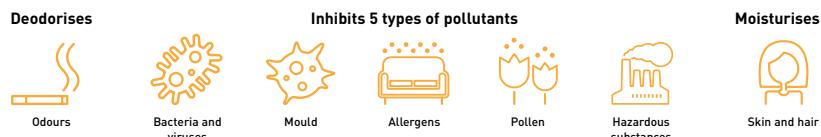

PACi NX Series – Standard range. From 2,5* to 14,0 kW

The standard range has been extended by adding to the line-up; 2,5, 3,6 and 5,0 kW.

These line-up gives more flexibility to design projects keeping a good balance of system cost and energy efficiency.

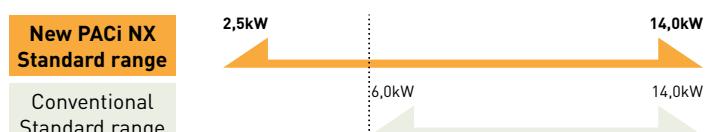

Capacity	kW	3,6	5,0	6,0	7,1	10,0	12,5	14,0
4 Way Cassette (PU3)	SEER	A++	A++	A++	A++	A++	—	—
	SCOP	A++	A++	A++	A++	A+	—	—
Adaptive Ducted (PF3)	SEER	A+	A++	A++	A+	A+	—	—
	SCOP	A+	A+	A+	A+	A	—	—

- Maximum SEER: A++, SCOP: A++
- R32 refrigerant
- Twin connection possible

* 2,5 kW mini cassette model will be available from Autumn 2020.



New wired remote controller - CZ-RTC6 / CZ-RTC6BL / CZ-RTC6BLW

- Intuitive control with stylish design profile
- Comfort control with your smartphone for multi-users
- Easy maintenance with service support App

Wired remote controller line-up	WLAN	Bluetooth®
CZ-RTC6	Non-wireless	—
CZ-RTC6BL	Bluetooth®	—
CZ-RTC6BLW*	WLAN & Bluetooth®	✓

* Available from Autumn 2020, compatible with new PACi NX Series.



New service checker interface

The new service checker interface* provides easy access to service parameters and service checker data via Bluetooth®.

* Available as a spare part, compatible with new PACi NX Series.



New Adaptive Ducted unit - PF3



New Adaptive Ducted PF3 has been completely re-designed to have better flexibility. The vertical installation is newly available with powerful ESP (maximum 150Pa).



1 Highly flexible installation

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan design suitable for both horizontal / vertical installation
- Drain pump included*

* Drain pump operation only available in horizontal application.

2 Installation possibilities (horizontal / vertical)

Vertical installation is newly available. ESP 150Pa, sufficient for remotely installing units away from the rooms.



Selectable inlet air position

Inlet air position may be adjusted by means of a removable panel, to allow rear or bottom entry, depending on the duct installation.

2 High seasonal performance with slim body

- Maximum SEER / SCOP: A++ / A+
- Slim height 250 mm in response to market demand where ceiling space is limited
- Light weight from 25 to 39kg


3 Comfort operation

- Super quiet operation, minimum 22dBA*
- nanoe™ X for better indoor air quality

* 3,6 kW model and when operating with ESP 50Pa in low fan mode.

Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation.
No need to alternate anymore.



Maximum SEER / SCOP

Total 7 capacity ranges from 3,6 – 14,0 kW.

Capacity	kW	3,6	5,0	6,0	7,1	10,0	12,5	14,0
PACi NX Series Standard	SEER	A+	A++	A++	A+	A+	—	—
	SCOP	A+	A+	A+	A+	A	—	—

Compact body

- With only 250 mm height
- Light unit from 25 – 39 kg


Conventional model	New Adaptive Ducted
33kg	30kg
290 mm	250 mm

New Adaptive Ducted




Super quiet operation minimum 22dBA

Improved proprietary casing design achieves smoother air flow for lower noise operation, compared to conventional model.



Sound pressure dB(A).

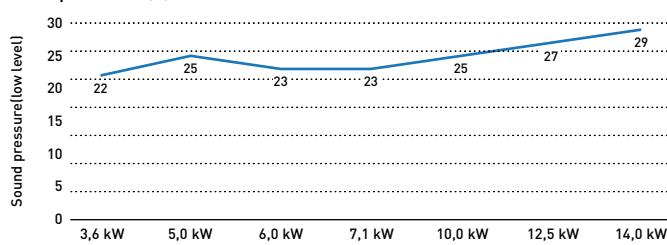


* Silent operation in full capacity range.

Better indoor air quality with nanoe™ X



The performance of nanoe™ X is maintained, even with 10 m long duct*.

Effect of improved air quality is enough to adapt to multi duct shapes depending on the projects.

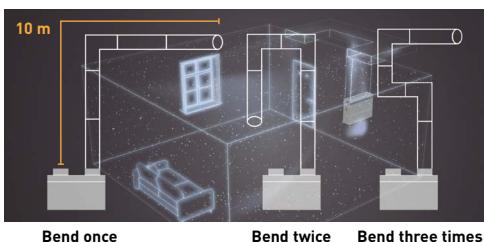

As the experiments demonstrate; even with a duct length of 10 m, effectiveness of nanoe™ X is maintained.

Generation PACi 90x90 Cassette - PU3/PU2



A modern flat panel design to blend into any space. These Cassettes have been developed to satisfy today's customer needs such as high energy saving, comfort and healthier air.



PACi 90x90 Cassette

- High seasonal efficiency, maximum SEER/SCOP= A+++ / A++¹⁾
- Advanced comfort and energy saving by Econavi sensor
- nanoe™ X Technology that improves indoor air quality as standard²⁾
- Super quiet operation from 27dB(A)

1) PU2 3,6 kW Elite model. 2) PU3 Series: Standard. PU2 Series: optional (CZ-CNEXU1 is required).


Always fresh and clean air with nanoe™ X

The 90x90 cassette with nanoe™ X, when tested, has shown to inhibit hazardous substances by 92 %, when compared to natural reduction*.


In addition to the 7 effects of nanoe™ X, the indoor unit can also be cleaned with a short operation of nanoe™ X + Dry mode.

* nanoe X Generator Mark 1. Please refer to page ↪?→.
PU3 Series: Controllers (CZ-RTC5B or CZ-RTC6/BL) are required.

PU2 Series: An optional accessory (CZ-CNEXU1) and controllers (CZ-RTC5B or CZ-RTC6/BL) are required.




These Cassettes offer upgraded Econavi and nanoe™ X Technology for making application space more comfortable, healthy and efficient.

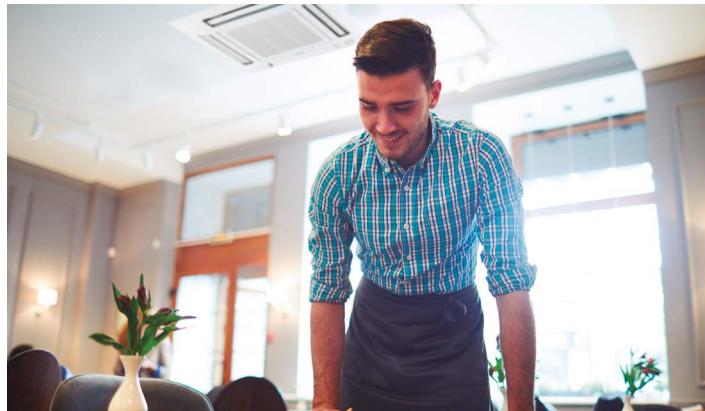


Optional Econavi intelligent sensor

Human activity sensor and floor temperature sensor can reduce waste energy, by optimising air conditioner operation.

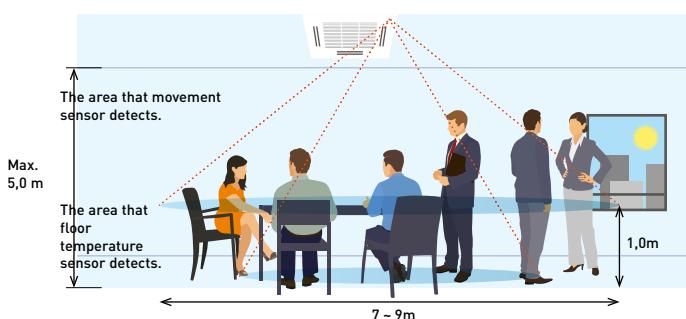

Humidity sensor.

Humidity sensor has air suction function, and realises comfort and energy saving based on temperature and humidity.

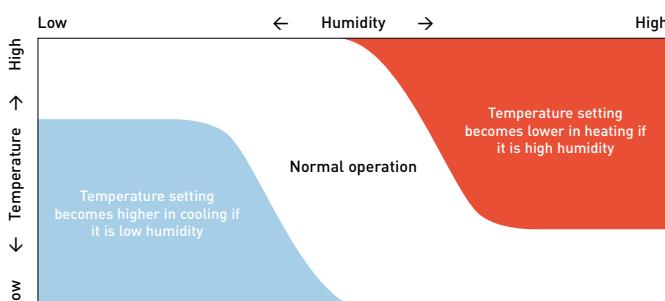

Advanced Econavi functions.

2 sensors (movement and floor temperature) can provide a reduction in wasted energy by means of effective control. Floor temperature can be detected with a ceiling height of 5 m.

INTELLIGENT ECO SENSORS



Econavi exclusive panel. Optional (CZ-KPU3AW)



Floor temperature sensor.

This sensor detects average floor temperature and operates circulation if floor temperature is low.




Movement sensor.

This sensor detects the amount of human activity, and operates effectively.

Wired remote controller CZ-RTC5B is required.

Group control, circulation function.

Circulating operation is activated when a room is unoccupied to evenly distribute air and minimize temperature gaps in both heating and cooling operation.



Circulation by Detecting no movement (10 min.)



Indirect air flow by detecting movement.

New PACi NX Series Standard Adaptive Ducted Unit Inverter+ • R32 refrigerant



nanoe™ X
nanoe™ X as a standard.



CZ-RTC5B



CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW
Optional Controller.
Wired remote controller.



CZ-RWS3 +
CZ-RWRC3
Optional Controller.
Infrared remote controller.



CZ-CENSC1
Optional Econavi Sensor.

	Single Phase						
Kit	3,6 kW	5,0 kW	6,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW
Remote controller	KIT-36PF3Z5	KIT-50PF3Z5	KIT-60PF3Z5	KIT-71PF3Z5	KIT-100PF3Z5	KIT-125PF3Z5	KIT-140PF3Z5
Cooling capacity Nominal [Min - Max]	kW	3,4(1,5 - 4,0)	5,0(1,5 - 5,3)	5,7(2,0 - 6,3)	6,8(2,6 - 7,7)	10,0(3,0 - 11,5)	12,5(3,2 - 13,5)
EER ¹⁾ Nominal [Min - Max]	W/W	3,78	2,78	3,54	3,18	3,66(5,36 - 2,81)	3,52(5,33 - 2,80)
SEER ²⁾	6,0A+	6,5A++	6,4A++	6,0A+	5,6A+	5,6	5,4
Pdesign	kW	3,4	5,0	5,7	6,8	10,0	12,5
Input power cooling Nominal [Min - Max]	kW	0,9	1,8	1,61	2,14	2,73(0,56 - 4,09)	3,55(0,60 - 4,82)
Annual energy consumption ³⁾	kWh/a	198	267	310	391	625	787
Heating capacity Nominal [Min - Max]	kW	3,4(1,5 - 4,6)	5,0(1,5 - 5,9)	5,7(1,8 - 7,0)	6,8(2,1 - 8,1)	10,0(3,0 - 14,0)	12,5(3,3 - 15,0)
COP ¹⁾ Nominal [Min - Max]	W/W	4,15	3,62	4,04	4,00	4,31(5,36 - 3,51)	4,02(5,50 - 3,45)
SCOP ²⁾	4,0A+	4,0A+	4,4A+	4,1A+	3,8A	3,6	3,5
Pdesign at -10 °C	kW	2,4	3,8	4,4	4,7	10,0	12,5
Input power heating Nominal [Min - Max]	kW	0,82	1,38	1,41	1,7	2,32(0,56 - 3,99)	3,11(0,60 - 4,35)
Annual energy consumption ³⁾	kWh/a	839	1303	1376	1591	3684	4848
Indoor unit	S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
External static pressure ⁴⁾ Nominal [Min - Max]	Pa	30(10 - 150)	30(10 - 150)	30(10 - 150)	30(10 - 150)	40(10 - 150)	50(10 - 150)
Air volume	Hi / Med / Lo	m³/min	14,0/13,0/10,0	16,0/15,0/12,0	21,0/19,0/15,0	21,0/19,0/15,0	32,0/26,0/21,0
Moisture removal volume	L/h	0,9	1,9	1,7	2,7	3,2	4,1
Sound pressure ⁵⁾	Hi / Med / Lo	dBA(A)	30/27/22	34/30/25	30/26/23	33/29/25	35/31/27
Sound power	Hi / Med / Lo	dB	53/50/45	57/53/48	53/49/46	56/52/48	58/54/50
Dimension	HxWxD	mm	250x800x730	250x800x730	250x1000x730	250x1400x730	250x1400x730
Net weight	kg	25	25	30	30	39	39
nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Outdoor unit	U-36PZ3E5	U-50PZ3E5	U-60PZ3E5	U-71PZ3E5	U-100PZ3E5	U-125PZ3E5	U-140PZ3E5
Power source	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current Cool	A	4,15-4,00-3,85	8,35-8,00-7,65	7,45-7,15-6,85	9,95-9,50-9,10	12,10-11,50-11,10	16,30-15,60-15,00
Heat	A	3,85-3,70-3,50	6,45-6,20-5,95	6,55-6,25-6,00	7,90-7,55-7,25	9,25-8,85-8,50	13,10-12,50-12,00
Air volume Cool / Heat	m³/min	33,6/34,0	32,7/31,9	42,6/41,5	44,7/45,9	76/70	86/78
Sound pressure Cool / Heat (Hi)	dB(A)	46/47	46/46	47/48	48/49	52/52	55/55
Sound power Cool / Heat (Hi)	dB	64/66	64/64	64/65	66/68	70/70	73/73
Dimension HxWxD	mm	619x824x299	619x824x299	695x875x320	695x875x320	996x980x370	996x980x370
Net weight	kg	32	35	42	50	90	94
Piping connections	Liquid pipe	Inch (mm)	1/4(6,35)	1/4(6,35)	1/4(6,35) ⁶⁾	1/4(6,35) ⁶⁾	3/8(9,52)
	Gas pipe	Inch (mm)	1/2(12,7)	1/2(12,7)	1/2(12,7) ⁷⁾	5/8(15,88)	5/8(15,88)
Pipe length range	m	3 - 15	3 - 20	3 - 30	3 - 40	5 - 50	5 - 50
Elevation difference (in/out) ⁸⁾	m	15/15 ⁹⁾	15/15 ⁹⁾	15/15 ⁹⁾	20/20 ⁹⁾	30	30
Pipe length for additional gas	m	7,5	7,5	7,5	10	30	30
Additional gas amount	g/m	10	15	15	17	45	45
Refrigerant (R32) / CO ₂ Eq.	kg / T	0,87/0,59	1,14/0,77	1,15/0,78	1,32/0,89	2,60/1,76	2,98/2,01
Operating range Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

Accessories

CZ-RTC6	NEW Wired remote controller (non-wireless)
CZ-RTC6BL	NEW Wired remote controller with Bluetooth®
CZ-RTC6BLW	NEW Wired remote controller with WLAN & Bluetooth® (available in Autumn 2020)
CZ-RTC5B	Wired remote controller with Econavi function and datanavi
CZ-RWS3 +	Infrared remote controller
CZ-RWRC3	
CZ-CAPWFC1	Commercial WLAN Adaptor

Accessories

PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm
CZ-CENSC1	Econavi energy savings sensor
CZ-56DAF2	Air Outlet Plenum for S-3650PF3E
CZ-90DAF2	Air Outlet Plenum for S-6071PF3E
CZ-160DAF2	Air Outlet Plenum for S-1014PF3E

New design duct range PF3 for R32 PACi NX Series

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.

Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum External Static pressure: 150Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2= 9,6 trillion OH radicals / sec) as standard for the long duct piping case*
- New wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.

Kit	10,0 kW		Three Phase		14,0 kW
Remote controller	KIT-100PF3Z8		KIT-125PF3Z8		KIT-140PF3Z8
	CZ-RTC5B		CZ-RTC5B		CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	10,0(3,0 - 11,5)	12,5(3,2 - 13,5)	14,0(3,3 - 15,0)
EER ¹⁾	Nominal (Min - Max)	W/W	3,66(5,36 - 2,81)	3,52(5,33 - 2,80)	3,18(5,32 - 2,70)
SEER ²⁾			5,6A+	5,5	5,4
Pdesign		kW	10,0	12,5	14,0
Input power cooling	Nominal (Min - Max)	kW	2,73(0,56 - 4,09)	3,55(0,60 - 4,82)	4,40(0,62 - 5,56)
Annual energy consumption ³⁾		kWh/a	625	790	912
Heating capacity	Nominal (Min - Max)	kW	10,0(3,0 - 14,0)	12,5(3,3 - 15,0)	14,0(3,4 - 16,0)
COP ¹⁾	Nominal (Min - Max)	W/W	4,31(5,36 - 3,51)	4,02(5,50 - 3,45)	3,79(5,48 - 3,13)
SCOP ²⁾			3,8A	3,60	3,5
Pdesign at -10 °C		kW	10,0	12,5	13,6
Input power heating	Nominal (Min - Max)	kW	2,32(0,56 - 3,99)	3,11(0,60 - 4,35)	3,69(0,62 - 5,12)
Annual energy consumption ³⁾		kWh/a	3684	4848	5379
Indoor unit					
External static pressure ⁴⁾	Nominal (Min - Max)	Pa	40[10 - 150]	50[10 - 150]	50[10 - 150]
Air volume	Hi / Med / Lo	m³/min	32,0/26,0/21,0	34,0/29,0/23,0	36,0/32,0/25,0
Moisture removal volume		L/h	3,2	4,1	4,9
Sound pressure ⁵⁾	Hi / Med / Lo	dB(A)	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250x1400x730	250x1400x730	250x1400x730
Net weight		kg	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2
Outdoor unit					
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	4,10 - 3,90 - 3,75	5,45 - 5,20 - 5,00	6,80 - 6,50 - 6,25
	Heat	A	3,15 - 3,00 - 2,90	4,40 - 4,15 - 4,00	5,25 - 4,95 - 4,80
Air volume	Cool / Heat	m³/min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB	70/70	73/73	74/74
Dimension	HxWxD	mm	996x980x370	996x980x370	996x980x370
Net weight		kg	90	94	94
Piping connections	Liquid pipe	Inch (mm)	3/8(9,52)	3/8(9,52)	3/8(9,52)
	Gas pipe	Inch (mm)	5/8(15,88)	5/8(15,88)	5/8(15,88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) ⁸⁾		m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO ₂ Eq.		kg / T	2,60/1,76	2,98/2,01	2,98/2,01
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) Medium External static pressure setting from factory. 5) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 6) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 7) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 8) When installing the outdoor unit at a higher position than the indoor unit. 9) Outdoor unit located lower / outdoor unit located higher. * Recommended fuse for the indoor 3 A. ** Above values are in the case of standard installation(horizontal installation in the ceiling, rear side air intake) and nanoe™ X OFF.



SEER: For S-3650PF3E + U-60PZ3E5. SCOP: For S-6071PF3E + U-60PZ3E5. SUPER QUIET: For S-3650PF3E + U-36PZ3E5. INTERNET CONTROL: Optional. Compatible with all Panasonic connectivity solutions. For detailed information go to the Control Systems section.

New PACi NX Series Standard 4 Way 90x90 Cassette Inverter+ • R32 refrigerant




New 4 Way 90x90 Cassette range PU3 for R32 PACi NX Series

Powerful turbo fan and intelligent Econavi sensor make sure high energy efficiency and nanoe™ X which is equipped as standard provides an exceptional level of comfort.



CZ-KPU3AW
Standard panel.



CZ-KPU3AW
Optional Econavi panel (CZ-RTC5B is required).



nanoe™ X as a standard.



CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW
Optional Controller.
Wired remote controller.



CZ-RWS3 +
CZ-RWRU3W
Optional Controller.
Infrared remote controller.

Kit	Single Phase						
	3,6 kW	5,0 kW	6,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW
Remote controller	KIT-36PU3Z5	KIT-50PU3Z5	KIT-60PU3Z5	KIT-71PU3Z5	KIT-100PU3Z5	KIT-125PU3Z5	KIT-140PU3Z5
Cooling capacity Nominal [Min - Max]	kW	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
EER ¹⁾ Nominal [Min - Max]	W/W	3,6[1,5-4,0]	5,0[1,5-5,6]	6,0[2,0-7,1]	7,1[2,6-7,7]	10,0[3,0-11,5]	12,5[3,2-13,5]
SEER ²⁾	8,1A++	8,0A++	7,8A++	6,8A++	6,8A++	6,8	6,5
Pdesign	kW	3,6	5,0	6,0	7,1	10,0	12,5
Input power cooling Nominal [Min - Max]	kW	0,83	1,28	1,61	2,17	2,62[0,6-4,0]	3,49[0,6-4,8]
Annual energy consumption ³⁾	kWh/a	156	219	269	365	515	—
Heating capacity Nominal [Min - Max]	kW	3,6[1,5-4,6]	5,0[1,5-6,4]	6,0[1,8-7,0]	7,1[2,1-8,1]	10,0[3,0-14,0]	12,5[3,3-15,0]
COP ¹⁾ Nominal [Min - Max]	W/W	5,07	4,63	4,48	4,23	4,93[3,59-5,36]	4,43[3,57-5,50]
SCOP ²⁾	4,8A++	4,7A++	4,9A++	4,6A++	4,4A+	4,0	3,9
Pdesign at -10 °C	kW	2,8	4,0	4,6	5,2	10,0	12,5
Input power heating Nominal [Min - Max]	kW	0,71	1,08	1,34	1,68	2,03[0,56-3,90]	2,82[0,60-4,20]
Annual energy consumption ³⁾	kWh/a	817	1191	1314	1583	3182	—
Indoor unit	S-3650PU3E	S-3650PU3E	S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
Air volume Hi / Med / Lo	m³/min	14,5/13,0/11,5	16,5/13,5/11,5	21,0/16,0/13,0	22,0/16,0/13,0	36,0/26,0/18,0	37,0/27,0/19,0
Moisture removal volume	L/h	0,7	1,6	1,7	2,5	2,7	4,8
Sound pressure ⁴⁾ Hi / Med / Lo	dB(A)	30/28/27	32/29/27	36/31/28	37/31/28	45/38/32	46/39/33
Sound power Hi / Med / Lo	dB	45/43/42	47/44/42	51/46/43	52/46/43	60/53/47	61/54/48
Dimension Indoor (H x W x D)	mm	256x840x840	256x840x840	256x840x840	256x840x840	319x840x840	319x840x840
Dimension Panel (H x W x D)	mm	33,5x950x950	33,5x950x950	33,5x950x950	33,5x950x950	33,5x950x950	33,5x950x950
Net weight Indoor / Panel	kg	19/5	19/5	20/5	20/5	25/5	25/5
nanoe X Generator		Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
Outdoor unit	U-36PZ3E5	U-50PZ3E5	U-60PZ3E5	U-71PZ3E5	U-100PZ3E5	U-125PZ3E5	U-140PZ3E5
Power source	V	220-230-240	220-230-240	220-230-240	220-230-240	220-230-240	220-230-240
Cool Current	A	3,85-3,70-3,55	5,95-5,70-5,45	7,45-7,15-6,85	10,00-9,65-9,25	12,10-11,50-11,10	16,30-15,60-15,00
Heat Air volume	A	3,35-3,20-3,05	5,05-4,85-4,65	6,20-5,95-5,70	7,80-7,45-7,15	9,25-8,85-8,50	13,10-12,50-12,00
Cool / Heat Sound pressure	dB(A)	46/47	46/46	47/48	48/49	52/52	55/55
Heat Sound power	dB	64/66	64/64	64/65	66/68	70/70	73/73
Dimension HxWxD	mm	619x824x299	619x824x299	695x875x320	695x875x320	996x980x370	996x980x370
Net weight	kg	32	35	42	50	90	94
Piping connections Liquid pipe	Inch (mm)	1/4(6,35)	1/4(6,35)	1/4(6,35) ⁵⁾	1/4(6,35) ⁵⁾	3/8(9,52)	3/8(9,52)
Gas pipe	Inch (mm)	1/2(12,70)	1/2(12,70)	1/2(12,70) ⁶⁾	5/8(15,88)	5/8(15,88)	5/8(15,88)
Pipe length range	m	3-15	3-20	3-30	3-40	5-50	5-50
Elevation difference (in/out) ⁷⁾	m	15/15 ⁸⁾	15/15 ⁸⁾	15/15 ⁸⁾	20/20 ⁸⁾	30	30
Pipe length for additional gas	m	7,5	7,5	7,5	10	30	30
Additional gas amount	g/m	10	15	15	17	45	45
Refrigerant (R32) / CO ₂ Eq.	kg / T	0,87/0,59	1,14/0,77	1,15/0,78	1,32/0,89	2,60/1,76	2,98/2,01
Operating range Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

Accessories

CZ-RTC6	NEW Wired remote controller (non-wireless)
CZ-RTC6BL	NEW Wired remote controller with Bluetooth®
CZ-RTC6BLW	NEW Wired remote controller with WLAN & Bluetooth® (available in Autumn 2020)
CZ-RTC5B	Wired remote controller with Econavi function and datanavi
CZ-RWS3 + CZ-RWRU3W	Infrared remote controller

Accessories

CZ-CAPWF1	Commercial WLAN Adaptor
CZ-KPU3AW	Econavi exclusive panel
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm

Technical focus

- High performance turbo fan, path system for heat exchanger
- Econavi: An optional Intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1= 4,8 trillion OH radicals/ sec) as standard for better indoor air quality, also possible to clean inside of the indoor unit with nanoe™ X ON + Dry operation
- Lower noise in slow fan operation
- Light weight, easy piping
- Drain pump included
- New wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.

Group control, circulation function

Circulating operation is activated when a room is unoccupied to evenly distribute air and minimize temperature gaps in both heating and cooling operation.

Kit	Three Phase		
	10,0 kW KIT-100PU3Z8 CZ-RTC5B	12,5 kW KIT-125PU3Z8 CZ-RTC5B	14,0 kW KIT-140PU3Z8 CZ-RTC5B
Remote controller			
Cooling capacity	Nominal (Min - Max) kW	10,0(3,0 - 11,5)	12,5(3,2 - 13,5)
EER ¹⁾	Nominal (Min - Max) W/W	3,82(5,36 - 2,88)	3,58(5,33 - 2,81)
SEER ²⁾		6,7A++	6,7
Pdesign	kW	10,0	12,5
Input power cooling	Nominal (Min - Max) kW	2,62(0,60 - 4,00)	3,49(0,60 - 4,80)
Annual energy consumption ³⁾	kWh/a	521	—
Heating capacity	Nominal (Min - Max) kW	10,0(3,0 - 14,0)	12,5(3,3 - 15,0)
COP ¹⁾	Nominal (Min - Max) W/W	4,93(3,59 - 5,36)	4,43(3,57 - 5,50)
SCOP ²⁾		4,4A+	4,0
Pdesign at -10 °C	kW	10,0	12,5
Input power heating	Nominal (Min - Max) kW	2,03(0,56 - 3,90)	2,82(0,60 - 4,20)
Annual energy consumption ³⁾	kWh/a	3182	—
Indoor unit		S-1014PU3E	S-1014PU3E
Air volume	Hi / Med / Lo	m³/min	36,0/26,0/18,0
Moisture removal volume		L/h	2,7
Sound pressure ⁴⁾	Hi / Med / Lo	dB(A)	45/38/32
Sound power	Hi / Med / Lo	dB	60/53/47
Dimension	Indoor (H x W x D)	mm	319 x 840 x 840
	Panel (H x W x D)	mm	33,5 x 950 x 950
Net weight	Indoor / Panel	kg	25/5
nanoe X Generator		Mark 1	Mark 1
Outdoor unit		U-100PZ3E8	U-125PZ3E8
Power source	V	380 - 400 - 415	380 - 400 - 415
Current	Cool A	4,10 - 3,90 - 3,75	5,45 - 5,20 - 5,00
	Heat A	3,15 - 3,00 - 2,90	4,40 - 4,15 - 4,00
Air volume	Cool / Heat	m³/min	76/70
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52
Sound power	Cool / Heat (Hi)	dB	70/70
Dimension	H x W x D	mm	996 x 980 x 370
Net weight		kg	90
Piping connections	Liquid pipe	Inch (mm)	3/8(9,52)
	Gas pipe	Inch (mm)	5/8(15,88)
Pipe length range		m	5 - 50
Elevation difference (in/out) ⁷⁾	m		30
Pipe length for additional gas	m		30
Additional gas amount	g/m		45
Refrigerant (R32) / CO ₂ Eq.	kg / T		2,60/1,76
Operating range	Cool Min ~ Max °C		-10 ~ +43
	Heat Min ~ Max °C		-15 ~ +24

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube (Ø0,35-Ø9,52) to the liquid tubing side indoor unit. 6) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. * Recommended fuse for the indoor 3 A. ** Above values are in the case of nanoe™ X OFF.



SEER: For S-3650PU3E + U-36PZ3E5. SCOP: For S-3650PU3E + U-60PZ3E5. ECONAVI and INTERNET CONTROL: Optional.

Compatible with all Panasonic connectivity solutions. For detailed information go to the Control Systems section.

Range of PACi NX units R32

PACi NX Series indoor units	3,5 ~ 3,6 kW	5,0 kW	6,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW			
NEW 4 Way 90x90 Cassette Inverter+ • R32 refrigerant		S-3650PU3E	S-3650PU3E	S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E			
NEW Adaptive Ducted Unit Inverter+ • R32 refrigerant		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E			
PACi NX Series outdoor units	3,6 kW	5,0 kW	6,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW			
NEW Standard • R32 refrigerant	 U-36 / 50	 U-60 / 71	 U-100 / 140	U-36PZ3E5	U-50PZ3E5	U-60PZ3E5	U-71PZ3E5	U-100PZ3E5 U-100PZ3E8	U-125PZ3E5 U-125PZ3E8	U-140PZ3E5 U-140PZ3E8

High performance and healthy air



nanoe™ X. Quality air for life. Panasonic's latest innovation nanoe™ X promotes well-being by inhibiting growth of certain harmful viruses and bacteria, as well as deodorising your home.



Filter Included.



With Super Quiet technology our devices are quieter than a library (30 dB(A)).



DC fan.
Safe and precise.



Down to -10 °C in cooling mode.
The air conditioner works in cooling mode when the outdoor temperature is as low as -10 °C.



Down to -15 °C in heating mode.
The air conditioner works in heat pump mode when the outdoor temperature is as low as -15 °C.



R410A/R22 renewal. The Panasonic renewal system allows good quality existing R410A or R22 pipe work to be re-used whilst installing new high efficiency R32 systems.

Energy saving



Our heat pumps containing the refrigerant R32 show a drastic reduction in the value of Global Warming Potential (GWP). An important step to reduce greenhouse gases. R32 is also a component refrigerant, making it easy to recycle.



Exceptional seasonal cooling efficiency based on the ErP regulation. Higher SEER ratings mean greater efficiency - year-round cooling savings!



Exceptional seasonal heating efficiency based on the ErP regulation. Higher SCOP ratings mean greater efficiency - year-round heating savings!



Intelligent Human Activity Sensor and Sunlight Sensor technologies that can detect and reduce waste energy, by optimising air conditioner operation according to room conditions. With just one touch of a button, you can save energy.



Inverter Plus. Inverter Plus System classification highlights Panasonic's highest performing systems.



Panasonic R2 Rotary Compressor. Designed to withstand extreme conditions, it delivers high performance and efficiency.

High connectivity



Internet control. A next generation system providing user-friendly remote control of air conditioning or heat pump units from everywhere, using a simple Android™ or iOS smartphone, tablet or PC via the internet.



BMS connectivity. The communication port can be integrated into the indoor unit and provides easy connection to, and control of, your Panasonic heat pump to your home or building management system.



5 Years Warranty.
We guarantee the outdoor unit compressors in the entire range for five years.

Panasonic®

To find out how Panasonic cares for you, log on to: www.aircon.panasonic.eu

Panasonic Marketing Europe GmbH
Panasonic Air Conditioning
Hagenauer Strasse 43, 65203 Wiesbaden, Germany

heating & cooling solutions